


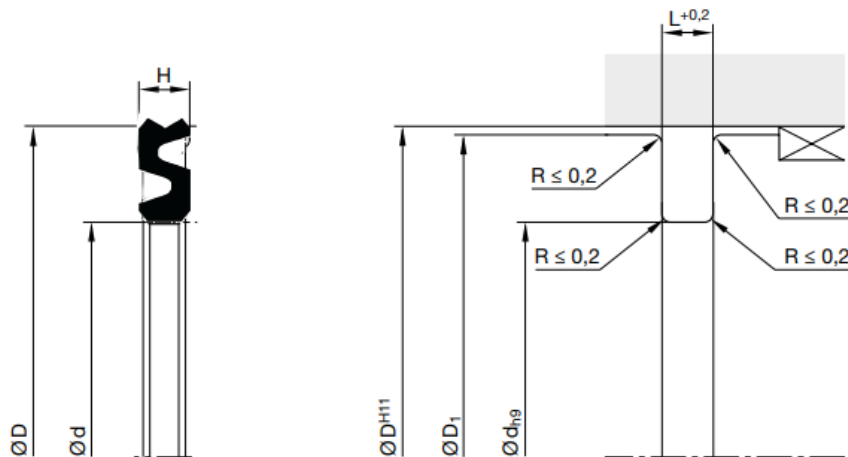

Technical Details

Operating conditions	
Maximum speed	≤ 12 bar
Temperature range	-20°C + 100°C
Maximum pressure	≤ 1m/s

DESIGN

PAK11 is a pneumatic cylinder seal that has been developed for use in pneumatic cylinders and valves. The double acting cylinder seal requires only small housing dimensions.

PAK11 is a low friction cylinder seal with two micro sealing edges and grease deposit in between.

FEATURES

- Flexible for easy installation
- Long life
- Good sealing performance
- Low static and dynamic friction
- Comes in a wide range of sizes

MATERIAL

Seal design comes in a variety of materials and sizes. For more information, please refer to MSDS datasheet.

APPLICATIONS

Light to medium duty applications