


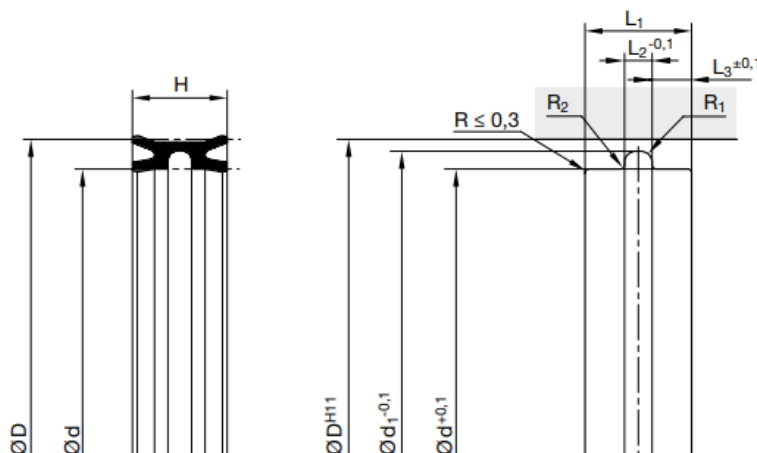

DESIGN

PAK7 is a pneumatic piston seal with a double U-ring with an integral guiding surface for double acting pistons. PAK7 can be easily mounted by pulling them over the one piece piston.

Range of application

For pneumatic cylinders with end-position cushioning

Operating conditions	
Operating pressure	< 16 bar
Operating temperature	-30°C + 80°C
Sliding speed	< 1m/s
Media	Compressed air, both lubricated and oil free (after greasing for fitting)

FEATURES

- Suitable for use in oiled and oil-free air
- Multi functioning sealing element
- Prevents metallic contact between piston and cylinder.
- Good wear resistance
- Smooth running
- Easy installation

MATERIAL

Seal design comes in a variety of materials and sizes. For more information, please refer to MSDS datasheet.

APPLICATIONS

Light duty applications