


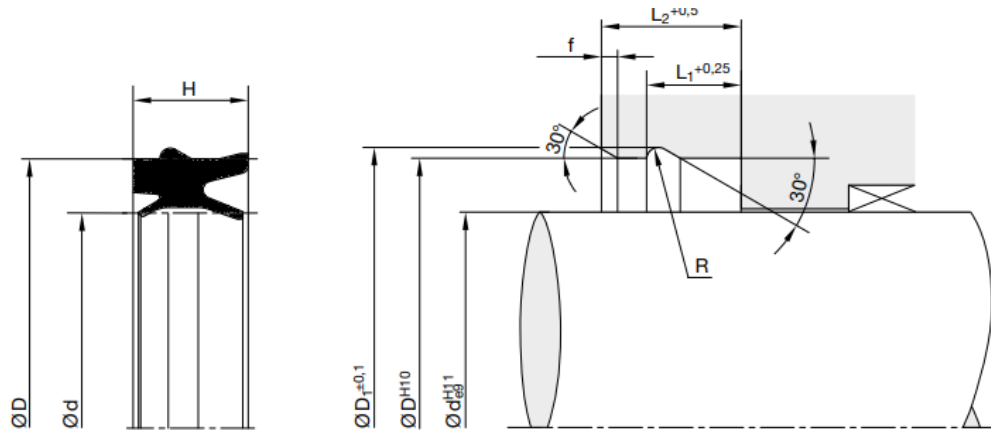

Technical Details

Metric

Operating conditions	
Maximum speed	1.0 m/sec
Temperature range	- 40°C
Maximum pressure	10 Bar

DESIGN

PAS4 is a high performance rod seal and wiper combination that is designed specifically for pneumatic applications. PAS4 gives significant improvements in cylinder performance in low lube air conditions and can be used in long and short stroke applications.

PAS4 is manufactured in high performance polyurethane, for easy installation, excellent low temperature performance, and long service life. Additionally, the seal design also offers low friction.

FEATURES

- Made from high performance polyurethane
- Easy installation
- Ultra long life
- Excellent low temperature performance
- Low friction

MATERIAL

Seal design comes in a variety of materials and sizes. For more information, please refer to MSDS datasheet.

APPLICATIONS

Light to medium duty applications